Bespoke Aluminium:

Residential Doors: Casement Windows: Lift & Slide Patio Doors: Bi-Folding Doors:







Handcrafted to perfection.
Aluminium windows and doors is the architects choice.
Available is a large choice of colours.
Manufactured in Ireland.



Protecting our Future




RECYCLING AND WASTE REDUCTION

D.L Windows is committed to recycling all its waste. This is done on many fronts, from waste material from site work down to manufacturing waste. It is extremely important to protect our environment.

WELCOME

Established in 2005, D.L Windows have grown to become a class-leading company in the supply of aluminium doors and windows. As a company we are committed to developing products that perform to the highest levels while combining the strength, durability and lightness of aluminium. Our products thorough re cycle ability are some of the most sustainable within the marketplace.

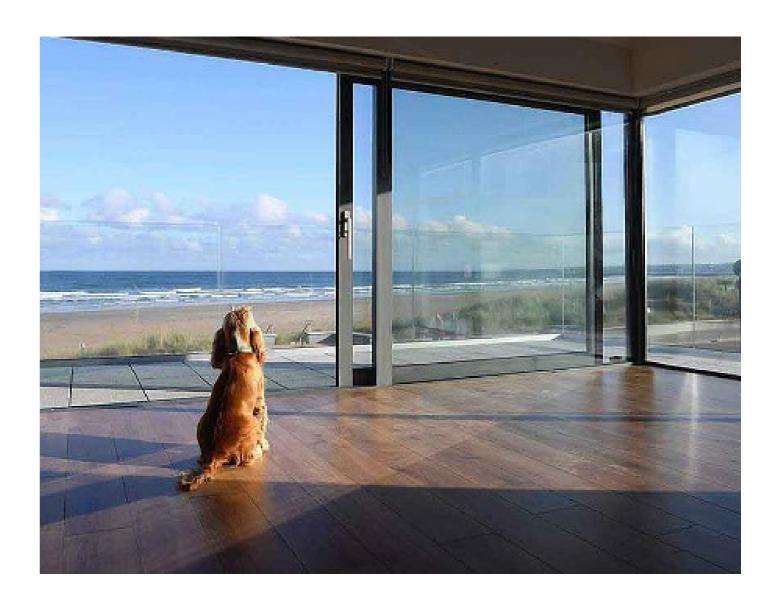

Windows

AP134 THERM+ WINDOW

The AP 134 Therm+ is a multi-chambered system for both casement and Tilt & Turn windows that combines optimal stability with high thermal performance. With its insulating finned strips, foams and gasketery, AP 134 Therm+ achieves Uvalues down to 1.1 W/m2K, making this a highly energy efficient window system with a pleasing aesthetic design.

PERFORMANCE BS6375 PT1+2

600 Pa - Air 1500 Pa - Water 2400 Pa - Wind resistance

FEATURES

- Slim sight lines
- Glazing 24mm to 54mm
- Ral Colour Options

SECURITY PAS 24

Secure by design

Document L compliant

THERMAL PERFORMANCE

Meets and exceeds current building control legislation

Based on standard GGF window

Double glazed with centre pane U-value 1.0 = 1.4 U value

Triple glazed with centre plane U-value 0.6 = 1.1 U value
















Lift & Slide Patio Doors

AP400

The AP 400 lift+slide door combines aesthetic Design and optimal strength with high thermal performance. Its slim sight lines are a result of its integral fixed light that incorporates glass to glass corners optimising the amount of light you get into your room. This door can achieve U-values down to 1.2 W/m2K, making this a highly energy efficient addition to your home.

PERFORMANCE BS6375 PT1+2

600 Pa - Air 300 Pa - Water 1200 Pa - Wind resistance

MAX FRAME SIZE/ SASH WEIGHT

	Frame Width (mm)	Frame Height (mm)	Sash Weight (kg)
Mono Door	5900	3000	300
Four Panel	11000	3000	300

THERMAL PERFORMANCE

Meets and exceeds current building control legislation

Based on 4m x 2.1m door

Double glazed with centre pane

U-value 1.0 = 1.5 U value

Triple glazed with centre plane U-value 0.6 = 1.2 U value











Bi-Folding Doors

AP300

The AP 300 Bi Fold door not only offers style and quality but is the perfect way to let the outside in. It can be used as a single leaf access door on a daily basis but can quickly be fully opened to *transform your room into* a unique indoor, outdoor living space. Better by design this door combines aesthetics and functionality with high thermal performance.







PERFORMANCE BS6375 PT1+2

150 Pa - Air 300 Pa - Water 1200 Pa - Wind resistance

FEATURES

- Slim sight lines
- Glazing 24mm to 44mm
- Ral Colour Options / Duel Colour

Door leaf configuration	Max Leaf	Max Leaf	Max Leaf
	Width (mm)	Height (mm)	Weight (Kg)
Hinged door	1000	2400	100

THERMAL PERFORMANCE

Meets and exceeds current building control legislation

Based on 5m x 2.2m door


Double glazed with centre pane

U-value 1.0 = 1.6 U value

Triple glazed with centre plane U-value 0.6 = 1.4 U value








Residental Doors

AP200

The AP200 Residential door has been designed with practicality and performance in mind. Combining aesthetic design, optimal strength and high thermal comfort this door offers many years of trouble-free use. It integrates seamlessly with all APS glazing systems to offer the complete package when it comes to glazing your house.

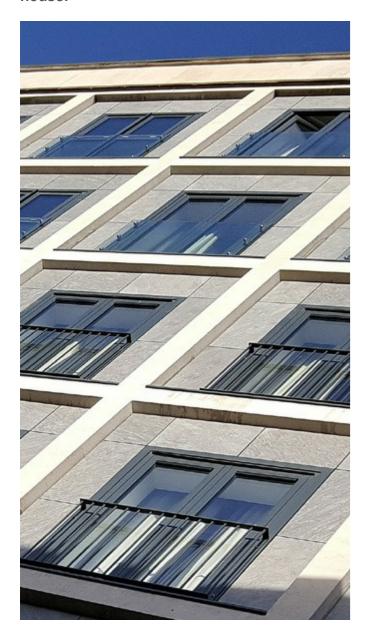



PERFORMANCE BS6375 PT1+2

600 Pa - Air 300 Pa - Water 2400 Pa - Wind resistance

FEATURES

- Slim sight lines
- Glazing 24mm to 44mm
- Ral Colour Options

SECURITY PAS 24

Secure by design Document L compliant


THERMAL PERFORMANCE

Meets and exceeds current building control legislation

Based on standard GGF window

Double glazed with centre pane U-value 1.0 = 1.6 U value

Triple glazed with centre plane U-value 0.6 = 1.3 U value

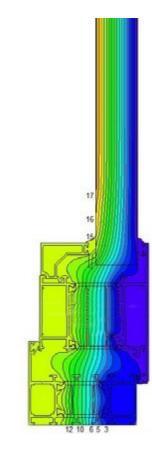







Handles





Chrome
Gold


Bi Fold Door
AP 300
Black
White
Chrome

Lift & Slide Door
AP 400
Black
Standard silver
Black
Stainless steel
Chrome

Grey


AP300 BI FOLD DOOR SYSTEM

Open in and open out configurations

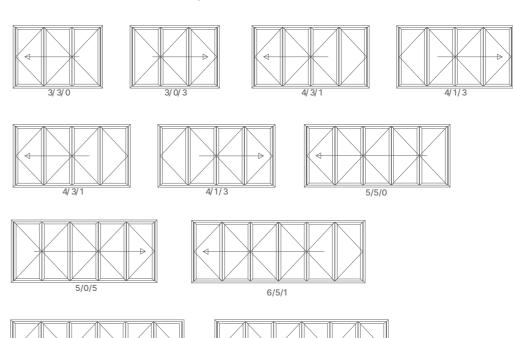


AP400 LIFT & SLIDE DOOR


Mono Track Configurations



Dual Track Configurations

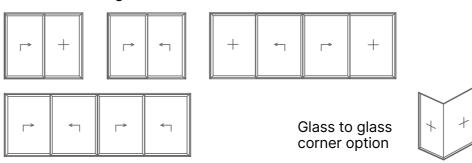

Triple Track Configurations



D.L Windows
Clonalvy
Garristown
Co.Dublin
018354066
Info@dlwindows.ie